



SPECIFICATIONS YHX SERIES

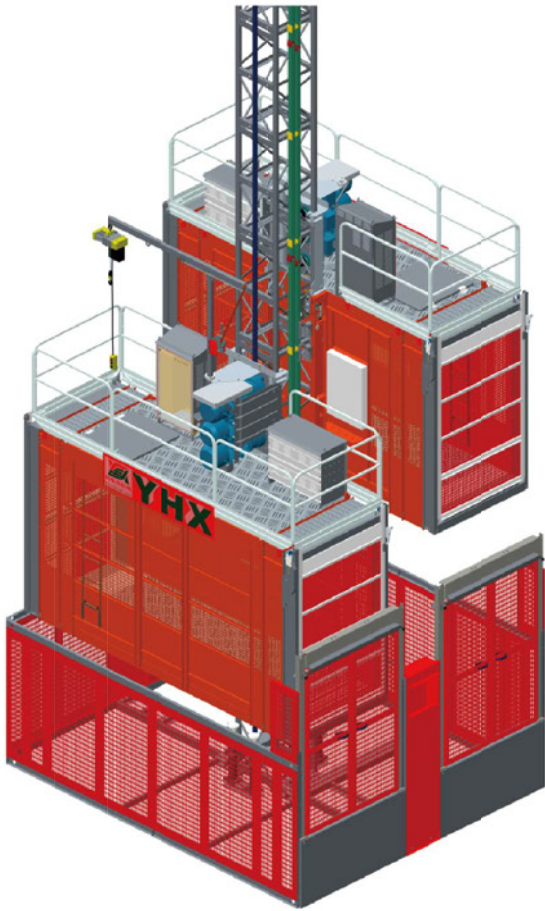

Features

- Modular design, easy to make different combinations according to requirement
- Adopting high quality steel for increased strength and weight reduction
- Main components are hot dip galvanised which guarantees longer lifetime
- With frequency control, starting and stopping is smooth, low start-up current, small wear
- Using high efficiency helical gear box, lower power consumption and operation cost
- With many different models of cage door available
- The mast section is 650mm x 650mm x 1508mm, use centrally located rack
- The rack modulus is 5mm
- Cage sizes are (L x W x H):
 - 3.2m x 1.5m x 2.3m/2.0m
 - 3.9m x 1.5m x 2.3m/2.0m
 - 4.6m x 1.5m x 2.3m/2.0m
- We can also design other cage sizes on user's request.

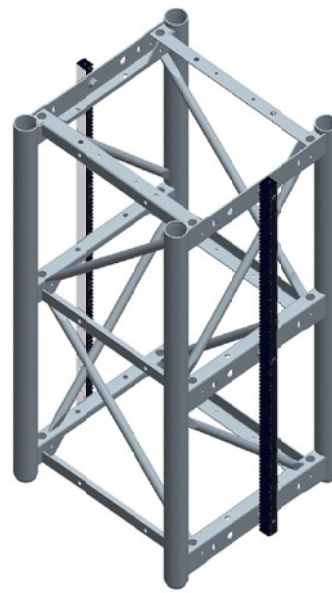

MAST SECTION



SAFETY DEVICE



SKY YHX SERIES HOIST



All information stated on this specification sheet comes from relevant professional engineers engaged for the purpose of compliance with appropriate regulations. SkyTech believes that all information stated on this specification sheet to be true and correct at the time of printing. SkyTech accepts no responsibility for its accuracy and recommends perusing your own sources for confirmation of stated details. Contact SkyTech directly for any further information regarding this product. All loads are static loads i.e. no load factors applied. Horizontal forces are not taken into account.

For more information, contact our team at office@skytechnz.co.nz

0508 skytech
skytechnz.co.nz

SPECIFICATIONS YHX SERIES

Model	Payload	Speed	Motor Power	Inverter Power
SC100 SC100/100	1000	0 - 35m/min	2 x 9.5kW	22kW
		0 - 46m/min	2 x 13kW	30kW
		0 - 54m/min	2 x 16kW	37kW
		0 - 63m/min	2 x 20kW	45kW
		0 - 96m/min	3 x 20kW	75kW
SC200 SC200/200	2000	0 - 35m/min	2 x 13kW	30kW
		0 - 46m/min	2 x 20kW	45kW
		0 - 54m/min	2 x 20kW	45kW
		0 - 63m/min	2 x 26kW	75kW
		0 - 96m/min	3 x 28kW	110kW
SC250 SC250/250	2500	0 - 35m/min	2 x 16kW	37kW
		0 - 46m/min	3 x 16kW	55kW
		0 - 54m/min	3 x 16kW	55kW
		0 - 63m/min	2 x 20kW	75kW
		0 - 96m/min	3 x 32kW	110kW
SC300 SC300/300	3000	0 - 35m/min	2 x 20kW	45kW
		0 - 46m/min	3 x 20kW	75kW
		0 - 54m/min	3 x 20kW	75kW
		0 - 63m/min	3 x 26kW	90kW
		0 - 96m/min	3 x 35kW	132kW



All information stated on this specification sheet comes from relevant professional engineers engaged for the purpose of compliance with appropriate regulations. SkyTech believes that all information stated on this specification sheet to be true and correct at the time of printing. SkyTech accepts no responsibility for its accuracy and recommends perusing your own sources for confirmation of stated details. Contact SkyTech directly for any further information regarding this product. All loads are static loads i.e. no load factors applied. Horizontal forces are not taken into account.

For more information, contact our team at office@skytechnz.co.nz

0508 skytech
skytechnz.co.nz

SKY YHX SERIES HOIST